APPENDIX A - LOW IMPACT DEVELOPMENT PRACTICES

LOW IMPACT DEVELOPMENT PRACTICES ALTERNATIVE APPROACHES FOR MANAGING STORM WATER RUNOFF

Natural hydrologic conditions may be altered radically by poorly planned development practices, such as introducing unneeded impervious surfaces, destroying existing drainage swales, constructing unnecessary storm sewers, and changing local topography. A traditional drainage approach of development has been to remove runoff from a site as quickly as possible and capture it in a detention basin. This approach leads ultimately to the degradation of water quality, as well as expenditure of additional resources for detaining and managing concentrated runoff at some downstream location.

The recommended alternative approach is to promote practices that will minimize post-development runoff rates and volumes, which will minimize needs for artificial conveyance and storage facilities. To simulate pre-development hydrologic conditions, forced infiltration is often necessary to offset the loss of infiltration by creation of impervious surfaces. The ability of the ground to infiltrate runoff depends upon the soil types and its conditions.

Preserving natural hydrologic conditions requires careful alternative site design considerations. Site design practices include preserving natural drainage features, minimizing impervious surface area, reducing the hydraulic connectivity of impervious surfaces, and protecting natural depression storage. A well-designed site will contain a mix of all those features. The following describes various techniques to achieve the alternative approaches:

- Preserving Natural Drainage Features. Protecting natural drainage features, particularly vegetated drainage swales and channels, is desirable because of their ability to infiltrate and attenuate flows and to filter pollutants. However, this objective is often not accomplished in land development. In fact, commonly held drainage philosophy encourages just the opposite pattern-streets and adjacent storm sewers typically are located in the natural headwater valleys and swales, thereby replacing natural drainage functions with a completely impervious system. As a result, runoff and pollutants generated from impervious surfaces flow directly into storm sewers with no opportunity for attenuation, infiltration, or filtration. Developments designed to fit site topography also minimize the amount of grading on site.
- Protecting Natural Depression Storage Areas. Depressional storage areas have no surface outlet, or drain very slowly following a storm event. They can be commonly seen as ponded areas in farm fields during the wet season or after large runoff events. Traditional development practices eliminate these depressions by filling or draining, thereby obliterating their ability to reduce surface runoff volumes and trap pollutants. The volume and release-rate characteristics of depressions should be protected in the design of the development site. The depressions can be protected by simply avoiding the depression or by incorporating its storage as additional capacity in required detention facilities.
- ♦ Avoiding Introduction of Impervious Areas. Careful site planning should consider reducing impervious coverage to the maximum extent possible. Building footprints, sidewalks, driveways, and other features producing impervious surfaces should be evaluated to minimize impacts on runoff.

- Reducing the Hydraulic Connectivity of Impervious Surfaces. Impervious surfaces are significantly less of a problem if they are not directly connected to an impervious conveyance system (such as storm sewer). Two (2) basic ways to reduce hydraulic connectivity are: routing of roof runoff over lawns; and reducing the use of storm sewers. Site grading should promote increasing travel time of storm water runoff and should help reduce concentration of runoff to a single point in the development.
- ♦ Routing Roof Runoff Over Lawns. Roof runoff can be easily routed over lawns in most site designs. The practice discourages direct connections of downspouts to storm sewers or parking lots. The practice also discourages sloping driveways and parking lots to the street. The routing of roof drains and crowning the driveway to allow runoff to discharge to pervious areas is desirable as the pervious area essentially acts as a filter strip.
- Reducing the Use of Storm Sewers. By reducing the use of storm sewers for draining streets, parking lots, and backyards, the potential for accelerating runoff from the development can be greatly reduced. The practice requires greater use of swales and may not be practical for some development sites, especially if there are concerns for areas that do not drain in a "reasonable" time. The practice requires educating local citizens and public works officials, who expect runoff to disappear shortly after a rainfall event.
- Reducing Street Widths. Street widths can be reduced by either eliminating on-street parking or by reducing cartway widths. Municipal planners and traffic designers should encourage narrower neighborhood streets, which ultimately could lower maintenance and maintenance related costs.
- Using Permeable Paving Materials. These materials include permeable interlocking concrete paving blocks or porous bituminous concrete. Such materials should be considered as alternatives to conventional pavement surfaces, especially for low use surfaces such as driveways, overflow parking lots, and emergency access roads.
- Reducing Building Setbacks. Reducing building setbacks reduces driveway and entry walks and is most readily accomplished along low-traffic streets where traffic noise is not a problem.
- Constructing Cluster Developments. Cluster developments can also reduce the amount of impervious area for a given number of lots. The biggest savings is in street length, which also will reduce costs of the development, Cluster development "clusters" the construction activity onto less-sensitive areas without substantially affecting the gross density of development.

In summary, careful consideration of the existing topography and implementation of a combination of the above mentioned techniques may avoid construction of costly storm water control measures. Other benefits include: reduced potential of downstream flooding, reduced water quality degradation of receiving streams and water bodies, enhancement of aesthetics, and reduction of development costs. Beneficial results include: more stable baseflows in receiving streams, improved groundwater recharge, reduced flood flows, reduced pollutant loads, and reduced costs for conveyance and storage.

<u>APPENDIX B – STORM WATER MANAGEMENT DESIGN CRITERIA</u>

APPENDIX B-1 - RATIONAL METHOD RUNOFF COEFFICIENTS

Hydrologic Soil Group and Slope Range

		Α			В			С			D	
Land Use	0 to 2%	2 to 6%	6+%	0 to 2%	2 to 6%	6+%	0 to 2%	2 to 6%	6+%	0 to 2%	2 to 6%	6+%
Cultivated	0.08 ^a	0.13	0.16	0.11	0.15	0.21	0.14	0.19	0.26	0.18	0.23	0.31
Land	0.14 ^b	0.18	0.22	0.16	0.21	0.28	0.20	0.25	0.34	0.24	0.29	0.41
Dantuma	0.12	0.20	0.30	0.18	0.28	0.37	0.24	0.34	0.44	0.30	0.40	0.50
Pasture	0.15	0.25	0.37	0.23	0.34	0.45	0.30	0.42	0.52	0.37	0.50	0.62
	0.10	0.16	0.25	0.14	0.22	0.30	0.20	0.28	0.36	0.24	0.30	0.40
Meadow	0.14	0.22	0.30	0.20	0.28	0.37	0.26	0.35	0.44	0.30	0.40	0.50
	0.05	0.08	0.11	0.08	0.11	0.14	0.10	0.13	0.16	0.12	0.16	0.20
Forest	0.08	0.11	0.14	0.10	0.14	0.18	0.12	0.16	0.20	0.15	0.20	0.25
Residential	0.25	0.28	0.31	0.27	0.30	0.35	0.30	0.33	0.38	0.33	0.36	0.42
1/8 acre	0.33	0.37	0.40	0.35	0.39	0.44	0.38	0.42	0.49	0.41	0.45	0.54
Residential	0.22	0.26	0.29	0.24	0.29	0.33	0.27	0.31	0.36	0.30	0.34	0.40
1/4 acre	0.30	0.34	0.37	0.33	0.37	0.42	0.36	0.40	0.47	0.38	0.42	0.52
Residential	0.19	0.23	0.26	0.22	0.26	0.30	0.25	0.29	0.34	0.28	0.32	0.39
1/3 acre	0.28	0.32	0.35	0.30	0.35	0.39	0.33	0.38	0.45	0.36	0.40	0.50
Residential	0.16	0.20	0.24	0.19	0.23	0.28	0.22	0.27	0.32	0.26	0.30	0.37
1/2 acre	0.25	0.29	0.32	0.28	0.32	0.36	0.31	0.35	0.42	0.34	0.38	0.48
Residential	0.14	0.19	0.22	0.17	0.21	0.26	0.20	0.25	0.31	0.24	0.29	0.35
1 acre	0.22	0.26	0.29	0.24	0.28	0.34	0.28	0.32	0.40	0.31	0.35	0.46
Industrial	0.67	0.68	0.68	0.68	0.68	0.69	0.68	0.69	0.69	0.69	0.69	0.70
industriai	0.85	0.85	0.86	0.85	0.86	0.86	0.86	0.86	0.87	0.86	0.86	0.88
Commercial	0.71	0.71	0.72	0.71	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72
Commercial	0.88	0.88	0.89	0.89	0.89	0.89	0.89	0.89	0.90	0.89	0.89	0.90
Stroots	0.70	0.71	0.72	0.71	0.72	0.74	0.72	0.73	0.76	0.73	0.75	0.78
Streets	0.76	0.77	0.79	0.80	0.82	0.84	0.84	0.85	0.89	0.89	0.91	0.95
Open Space	0.05	0.10	0.14	0.08	0.13	0.19	0.12	0.17	0.24	0.16	0.21	0.28
Open Space	0.11	0.16	0.20	0.14	0.19	0.26	0.18	0.23	0.32	0.22	0.27	0.39
Parking	0.85	0.86	0.87	0.85	0.86	0.87	0.85	0.86	0.87	0.85	0.86	0.87
raikilig	0.95	0.96	0.97	0.95	0.96	0.97	0.95	0.96	0.97	0.95	0.96	0.97

NOTES:

Source: Rawls, W.J., S.L. Long, and R.H. McCuen, 1981. Comparison of Urban Flood Frequency Procedures

Preliminary Draft Report prepared for the Soil Conservation Service, Beltsville, Maryland

^aRunoff coefficients for storm recurrence intervals less than twenty-five (25) years.

^bRunoff coefficients for storm recurrence intervals of twenty-five (25) years or more.

APPENDIX B-2 - RUNOFF CURVE NUMBERS (FROM NRCS (SCS) TR-55)

Runoff Curve Numbers for Urban Areas					
Cover Description		Curve Numbers for Hydrologic So Groups			
Cover Type and Hydrologic Condition	Average Percent Impervious Area	А	В	С	D
Fully Developed Urban Areas (Vegetation Established)					
Open Space (lawns, parks, golf courses, etc.):					
Poor Condition (grass cover < 50%)		68	79	86	89
Fair Condition (grass cover 50% to 75%)		49	69	79	84
Good Condition (grass cover > 75%)		39	61	74	80
Impervious Areas:					
Paved Parking Lots, Roofs, Driveways, etc.		98	98	98	98
Streets and Roads:					
Paved: Curbed and Storm Sewers		98	98	98	98
Paved: Open Ditches		83	89	92	93
Gravel		76	85	89	91
Dirt		72	82	87	89
Urban Districts:					
Commercial and Business	85%	89	92	94	95
Industrial	72%	81	88	91	93
Residential Districts by Average Lot Size:					
1/8 Acres or less	65%	77	85	90	92
1/4 Acre	38%	61	75	83	87
1/3 Acre	30%	57	72	81	86
1/2 Acre	25%	54	70	80	85
1 Acre	20%	51	68	79	84
2 Acres	12%	46	65	77	82

APPENDIX B-2 – CONT'D

	Runoff Curve Numbers for A	gricultural Lands				
	Cover Description		Curve Numbers for Hydrologic Soil Groups			
Cover Type	Treatment	Hydrologic Condition	А	В	с	D
	Bare Soil	_	77	86	91	94
Fallow	Crop Residue Cover (CR)	Poor	76	85	90	93
	Grop Residue Gover (Ort)	Good	74	83	88	90
		Coou		0.5		30
	Straight Row (SR)	Poor	72	81	88	91
	est est gere i	Good	67	78	85	89
	SR + CR	Poor	71	80	87	90
		Good	64	<i>7</i> 5	82	85
	Contoured (C)	Poor	70	79	84	88
	551105411 551 (5)	Good	65	75	82	86
Row Crops	C + CR	Poor	69	78	83	87
		Good	64	74	81	85
	Contoured & Terraced (C & T)	Poor	66	74	80	82
		Good	62	71	78	81
	C & T CR	Poor	65	73	79	81
		Good	61	70	77	80
	SR	Poor	65	76	84	88
		Good	63	<i>7</i> 5	83	87
	SR + CR	Poor	64	<i>7</i> 5	83	86
		Good	60	72	80	84
	С	Poor	63	74	82	85
Creatl Crain		Good	61	<i>7</i> 3	81	84
Small Grain	C + CR	Poor	62	<i>7</i> 3	81	84
		Good	60	72	80	83
	C&T	Poor	61	72	79	82
		Good	59	70	78	81
	C & T + CR	Poor	60	71	78	81
		Good	58	69	77	80
	SR	Poor	66	77	85	89
Close Seeded or		Good	58	72	81	85
Broadcast Legumes	С	Poor	64	<i>7</i> 5	83	85
Or Rotation		Good	55	69	<i>78</i>	83
Meadow	C & T	Poor	63	73	80	83
		Good	51	67	76	80

APPENDIX B-2 - CONT'D

Runoff Curve Numbers for Other Agricultural Lands

Cover Description		Curve Numbers for Hydrologic Soil Groups			
Cover Type	Hydrologic Condition	Α	В	С	D
	Poor	77	86	91	94
Pasture, Grassland, or Range – Continuous Forage for Grazing	Fair	76	85	90	93
	Good	74	83	88	90
Meadow – Continuous Grass, Protected from Grazing and Generally Mowed for Hay		30	58	71	<i>7</i> 8
	Poor	48	67	77	83
Brush – Brush, Weed, Grass Mixture with brush the major element	Fair	35	56	70	<i>77</i>
	Good	30	48	65	<i>7</i> 3
	Poor	57	73	82	86
Woods – Grass Combination (orchard or tree farm)	Fair	43	65	76	82
	Good	32	58	72	<i>79</i>
	Poor	45	66	77	83
Woods	Fair	36	60	73	<i>79</i>
	Good	30	55	70	<i>77</i>
Farmsteads – Buildings, Lanes, Driveways and Surrounding Lots.		59	74	82	86

APPENDIX B-3 - MANNING'S EQUATION "n" ROUGHNESS COEFFICIENTS

Concrete Pipe Smooth-Lined Corrugated Metal Pipe Corrugated Plastic Pipe Annular Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations 75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter	0.011 0.012 0.012 0.024 0.024 0.027 0.025 0.033
Smooth-Lined Corrugated Metal Pipe Corrugated Plastic Pipe Annular Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations 75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.012 0.024 0.024 0.027 0.025 0.033
Corrugated Plastic Pipe Annular Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations 75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.024 0.024 0.027 0.025 0.033
Annular Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations 75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.024 0.027 0.025 0.033
68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations 75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.027 0.025 0.033
75 mm x 25 mm (3 in x 1 in) Corrugations 125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.027 0.025 0.033
125 mm x 25 mm (5 in x 1 in) Corrugations 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter).025).033
150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.033
Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	
75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter).024
75 mm x 25 mm (3 in x 1 in), 125 mm x 25 mm (5 in x 1 in), or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.024
or 150 mm x 50 mm (6 in x 2 in) Corrugations Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	0.024
Helically Corrugated Steel And Aluminum Alloy Pipe (Plain or Polymer Coated) 68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	
68 mm x 13 mm (2 2/3 in x 1/2 in) Corrugations a. Lower Coefficients* 450 mm (18 in) Diameter 600 mm (24 in) Diameter	
a. Lower Coefficients* 0 450 mm (18 in) Diameter 0 600 mm (24 in) Diameter 0	
450 mm (18 in) Diameter 0 600 mm (24 in) Diameter 0	
600 mm (24 in) Diameter 0	0.014
	0.016
900 mm (36 in) Diameter 0	0.019
	0.020
	0.021
, , , , , , , , , , , , , , , , , , ,	0.024
Annular or Holically Corrugated Stool or Aluminum Alloy Ding Arches	
or Other Non- Circular Metal Conduit (Plain or Polymer Coated)	0.024
	0.012
· ·	0.013
	0.015
	0.014
	0.050
	0.030
	0.020
	0.030
).035
	0 - 0.050
	0 - 0.140
	0 - 0.150
	0.40
Streams:	
	0 - 0.035
Some Weeds (Heavy brush on banks) 0.050	5 - 0.050


Notes:

- * Use the lower coefficient if any one (1) of the following conditions apply:
 - a. A storm pipe longer than twenty (20) diameters, which directly or indirectly connects to an inlet or manhole, located in swales adjacent to shoulders in cut areas, shoulders in cut areas or depressed medians.
 - b. A storm pipe which is specially designed to perform under pressure.
- ** Use the higher coefficient if any one (1) of the following conditions apply:
 - a. A storm pipe which directly or indirectly connects to an inlet or manhole located in highway pavement sections or adjacent to curb or concrete median barrier.
 - b. A storm pipe which is shorter than twenty (20) diameters long.
 - c. A storm pipe which is partly lined helically corrugated metal pipe.

APPENDIX B-4

NOMOGRAPH FOR DETERMINING SHEET FLOW

(for use with the Rational Method)

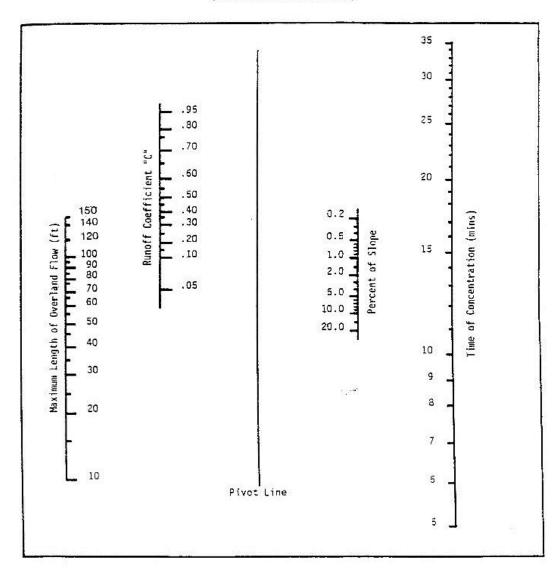

APPENDIX B-5

Worksheet #1: Time of concentration (Tc) or travel time (Tt)

Project	_ By	Date
Location	_ Checked	Date
Circle one: Present Developed		
Circle one: Tc Tt through subarea		
NOTES: Space for as many as two segments per flow worksheet.	w type can be use	d for each
Include a map, schematic, or description of	f flow segments.	
Sheet flow (Applicable to T _c only) Segment ID		
Surface description (table 3-1)		
2. Manning's roughness coeff., n (table 3-1)		
3. Flow length, L (total L \leq **150 ft) ft		
4. Two-yr 24-hr rainfall, P2 in		
5. Land slope, s		
6. $T_t = \frac{0.007 \text{ (rd.)}}{P_2^{0.5} \text{ s}^{0.4}}$ Compute $T_t \dots hr$	+	=
Shallow concentrated flow Segment ID		
7. Surface description (paved or unpaved)		
8. Flow length, L		
9. Watercourse slope, sft/ft		
10. Average velocity, V (figure 3-1) ft/s		
11. $T_t = \frac{L}{3600 \text{ v}}$ Compute $T_t \dots hr$	+	=
Channel flow Segment ID		and Control
12. Cross sectional flow area, a		
13. Wetted perimeter, P_W ft		
14. Hydraulic radius, $r = \frac{\alpha}{P_{\omega}}$ Compute $r \dots ft$		
15. Channel slope, s		10401
16. Manning's roughness coeff., n		1000
17, $V = \frac{1.49 \cdot 70 \cdot 3^{\frac{1}{2}}}{n}$ Compute $V \dots ft/s$		
18. Flow length, L		
19. $T_t = \frac{L}{3600V}$ Compute $T_t \dots hr$	+	=
20. Watershed or subarea Tc or Tt (add Tt in steps 6,	11, and 19)	hr
*Table 3-1 per latest TR-55, Urban Hydrology for Sm **150' sheet flow length per latest TR-55 revision		1 -11-11-11-11-11-11-11-11-11-11-11-11-1

Strasburg Township Storm Water Management Ordinance

APPENDIX B-6

AVERAGE VELOCITIES FOR ESTIMATING TRAVEL TIME FOR SHALLOW CONCENTRATED FLOW

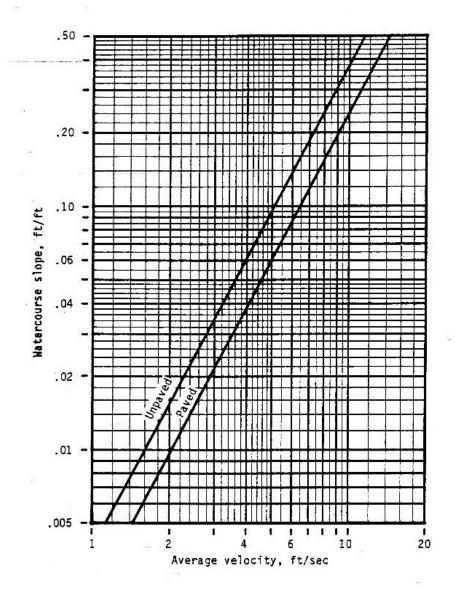


Figure 3-1.-Average velocities for estimating travel time for shallow concentrated flow.

3-2

(210-VI-TR-55, Second Ed., June 1986)

APPENDIX C

Carbonate Geology Certification

The following note shall be attached to all Storm Water Management Site Plans and signed and sealed by the developer's qualified professional, "I,, certify that the proposed detention basin is/is not (circle one) underlain by carbonate geology."
APPENDIX D
Strasburg Township Storm Water Management Site Plan Approval Certification
At a meeting on
Board of Supervisors Signature
APPENDIX E
Strasburg Township Engineer Review Certificate
Reviewed by the Strasburg Township Engineer this day of, 20
** * Signature of the Strasburg Township Engineer.

APPENDIX F

Landowner Acknowledgement of Permanence of BMPs

I, the undersigned hereby represer	t that no person shall modify, remove, fill, landscape, or alter an
Storm Water Management BMPs	s, facilities, areas, or structures without the written approval o
Strasburg Township.	
Date	Signature of Owner or Owner's agent

APPENDIX G

STORM WATER MANAGEMENT AGREEMENT AND DECLARATION OF EASEMENT

THIS AGREEN	IENT AND DECLARATION OF EASEMENT made this	day
of	, 20, by and between	,
Lancaster County, P	(hereinafter referred to as the "Grantor") Pennsylvania, a Township duly organized under the laws its municipal office located at <street address="">, Clownship").</street>	of the Commonwealth of
BACKGROUN	<u>D</u>	
Grantor is th	ne owner of premises located	
	a, as more specifically described in a deed recorded in Re	
Page,	in the Office of the Recorder of Deeds in and for Lancas	ter County, Pennsylvania,
and as shown on the		, prepared by
	, Drawing No	
dated as the "Premises").	, last revised	_ (hereinafter referred to

Prior to beginning construction on any subdivision or land development, Grantor is required, under the Lancaster County Subdivision and Land Development Ordinance / Strasburg Township Subdivision and Land Development Ordinance (if enacted) and the Strasburg Township Storm Water Management Ordinance (collectively referred to as the "Ordinance"), to file a final plan with the Township Board of Supervisors. Pursuant to the Ordinance, Grantor must provide storm water management data in its application. The Ordinance requires that Grantor's final plan reflect and/or be accompanied with supporting documentation which identifies the ownership of, and the method of administering and maintaining, all permanent storm water management facilities. Drainage courses, swales, grassed waterways, storm water inlets, pipes, conduits, detention basins, retention basins, infiltration structures, and other storm water management facilities, including Best Management Practices facilities, shall be included under the term "storm water management facilities" in this Agreement and Declaration of Easement.

The purpose of this Agreement and Declaration of Easement is to describe the ownership and maintenance responsibilities for the storm water facilities which will be installed on the Premises and to impose the ownership and maintenance responsibilities upon Grantor, his heirs, personal representatives and assigns and upon successor owners of the Premises, and set forth the rights of the Township.

NOW, THEREFORE, intending to be legally bound hereby and in consideration of receiving approval of its Subdivision and/or Land Development Plan from Lancaster County Planning Commission or the Township Board of Supervisors, as applicable, or its Storm Water Management Site Plan (hereinafter referred to as the "Plan") from the Township Board of Supervisors, and in consideration of receiving permits from the Township to develop the Premises, Grantor, for Grantor and the heirs, personal representatives and assigns of Grantor, covenant and declare as follows:

- 1. The storm water facilities will be owned by Grantor, his heirs, personal representatives, successors and assigns.
- 2. All drainage courses, swales, storm water inlets, pipes, conduits, detention basins BMPs, and other storm water facilities shall be installed, constructed and maintained by Grantor, his heirs, personal representatives, successors and assigns, in a first-class condition in conformance with the Plan, as approved by the Township Board of Supervisors, including any accompanying storm water management plans and information, and as recorded in the Office of the Recorder of Deeds in and for Lancaster County, and in a manner sufficient to meet or exceed the performance standards and specifications set forth on the Plan, as approved by the Lancaster County Planning Commission and/or Township Board of Supervisors, including any accompanying storm water management plans and information. These responsibilities shall include, but not be limited to, the following:
 - (a) Liming, fertilizing, seeding and mulching of vegetated channels and all other unstabilized soils or areas according to the specifications in the "Erosion and Sediment Pollution Control Manual" published by the Pennsylvania Department of Environmental Protection, the Penn State Agronomy Guide, or such similar accepted standard.
 - (b) Reestablishment of vegetation by seeding and mulching or sodding of scoured area or areas where vegetation has not been successfully established.
 - (c) Mowing as necessary to maintain adequate stands of grass and to control weeds. Chemical weed control may be used if federal, state and local laws and regulations are met. Selection of seed mixtures shall be subject to approval by the Township.
 - (d) Removal of silt from all permanent structures which trap silt or sediment in order to keep the material from building up in grass waterways, pipes, detention or retention basins, infiltration structures, BMPs, and/or other facilities and thus reducing their capacity.
 - (e) Removal of silt from all permanent drainage structures, in particular BMPs, in order to maintain the design storage volumes. Regular programs shall be established and maintained.
 - (f) Regular inspection of the areas in question to assure proper maintenance and care, including but not limited to proper implementation of BMPs. **ADD ANY SPECIFIC INSPECTION REQUIREMENTS IN THE PCSM PLAN.**

- (g) Regular maintenance to ensure that all pipes, swales and detention facilities shall be kept free of any debris or other obstruction. **ADD ANY SPECIFIC MAINTENANCE REQUIREMENTS IN THE PCSM PLAN.**
- (h) Regular maintenance of all facilities designed to improve water quality to ensure that such facilities function in accordance with their design. ADD ANY SPECIFIC MAINTENANCE REQUIREMENTS IN THE PCSM PLAN SUCH AS (IF APPLICABLE).
- (i) Maintenance of the infiltration bed and infiltration system by mowing grass regularly over the infiltration bed; keeping the yard drains and roof drains free of debris in good repair at all times; flushing the infiltration system using a water hose at the cleanouts once every 90 days to ensure the infiltration system is clear of debris; keeping the sumps in the yard inlets and downspout sumps free of debris; and inspecting the infiltration bed four times per year or after each rain event exceeding one inch.
 - (j) Repair of any subsidence, including subsidence caused by sinkholes.
- (k) **IF APPLICABLE:** Replacement of displaced riprap within the outlet energy dissipater immediately after it is displaced, particularly after major storm discharge events.
- (I) **IF APPLICABLE:** Vacuum sweeping of areas of porous paving to keep surface free of sediment as needed, typically three (3) to four (4) times per year and maintaining all areas of porous paving free from sealing, surfacing or re-paving with non-porous materials.
 - (m) Removal of trash and debris on a regular basis.
- (n) Include a statement that the approved Operations and Maintenance (O&M) Plan is attached as an exhibit if there are any requirements in addition to those in Paragraph 2.
- (o) Grantor, his heirs, personal representatives, successors and assigns, shall be responsible for performing the foregoing maintenance.
- 3. Grantor, for himself, his heirs, personal representatives, successors and assigns, agrees that the failure to maintain all drainage courses, swales, storm water inlets, pipes, conduits, detention basins, BMPs, and other storm water management facilities in a first-class condition in conformance with this Agreement and Plan, as approved by the Township Board of Supervisors, including any accompanying storm water management plans and information, shall constitute a nuisance and shall be abatable by the Township as such.
- 4. The Grantor agrees to provide the Township with an annual written report documenting the following items:
 - (a) Listing of all Post-Construction Storm Water Management Best Management Practices that were installed to meet requirements in National Pollutant Discharge Elimination System Permits for Storm water Discharges Associated with Construction Activities approved since March 10, 2003;
 - (b) The exact location of the Post-Construction Storm Water Management Best Management Practices (e.g., street address);

- (c) Information (e.g., name, address, phone number(s)) for Best Management Practices owner and entity responsible for Best Management Practices Operation and Maintenance, if different from Best Management Practices owner;
 - (d) The type of Best Management Practices and the year it was installed;
- (e) Maintenance required for the Best Management Practices type according to the Pennsylvania Storm Water BMP Manual or other manuals and resources;
- (f) The actual inspection/maintenance activities performed for each Best Management Practices during the year;
- 5. Grantor, for himself, his heirs, personal representatives, successors and assigns, authorizes the Township, at any time and from time to time, by its authorized representatives, to enter upon the Premises to inspect the storm water facilities. Grantor acknowledges that the Township has the right to establish a schedule of regular inspections including, but not limited to, annual inspections. If the Township determines to establish a schedule of inspections of storm water management facilities, Grantor, its successors and assigns, shall reimburse the Township for the costs of such inspection and/or pay any annual fee for the administration of a Township storm water management program.
- 6. The Township may require that Grantor, and assigns or any future owner or occupier of the Premises or any part thereof, take such corrective measures as the Township may deem reasonably necessary to bring the Premises into compliance with this Agreement and with the Plan, as approved by the Strasburg Township Board of Supervisors, including any accompanying storm water management plans and information.
- 7. Upon the failure of the owner or occupier of the Premises or any part thereof to comply with the terms of this Storm Water Management Agreement or to take corrective measures following reasonable notice from Strasburg Township, Strasburg Township, through its authorized representatives, may take such corrective measures as it deems reasonably necessary to bring the Premises into compliance with this Agreement and with the Plan, as approved by the Strasburg Township Board of Supervisors, including any accompanying storm water management plans and information, including, but not limited to, the removal of any blockage or obstruction from drainage pipes, swales, detention basins, and Best Management Practices, and may charge the cost thereof to Grantor, his heirs, personal representatives, successors and assigns, or any owner of the Premises or any part thereof and, in default of such payment, may cause a municipal lien to be imposed upon the Premises or any part thereof. Any municipal lien filed pursuant to this Agreement shall be in the amount of all costs incurred by Strasburg Township, plus a penalty of ten (10) percent of such costs, plus Strasburg Township's reasonable attorneys' fees.
- 8. If ownership or maintenance responsibility of the storm water management facilities is assigned to a home owners' association, condominium unit owners' association, or similar entity, Strasburg Township shall be notified. If such association fails to properly maintain the storm water management facilities, Strasburg Township shall have the same rights granted to municipalities under Section 705 of the Pennsylvania Municipalities Planning Code, Act of July 31, 1968, P.L. 805, No. 247, with reference to maintenance of common open space, to maintain the storm water management facilities. Any association so formed shall enter into an agreement with the Township recognizing its duties and Strasburg Township's rights under this Agreement.

- 9. Grantor hereby imposes upon the Premises for the benefit of all present and future owners of the Premises or part of the Premises, Strasburg Township, and all other property owners affected by the storm water facilities, the perpetual right, privilege and easement for the draining of storm water in and through the drainage courses, swales, storm water inlets, pipes, conduits, detention basins, Best Management Practices, and other storm water facilities depicted on the plan or plans submitted to Strasburg Township or hereafter made of record and now or hereafter installed on or constructed upon the Premises and, in addition, easements of access to the storm water facilities.
- 10.Grantor agrees to indemnify Strasburg Township and all of its elected and appointed officials, agents and employees (hereafter collectively referred to as the "Indemnitees") against and hold Indemnitees harmless from any and all liability, loss or damage, including attorneys' fees and costs of investigation and defense, as a result of claims, demands, costs or judgments against Indemnitees which arise as a result of the design, installation, construction or maintenance of the storm water facilities.
- 11. Grantor's personal liability under this Agreement shall cease at such time as (a) all storm water management facilities have been constructed in accordance with the specifications of the Lancaster County and/or Strasburg Township Subdivision and Land Development Ordinance, the Strasburg Township Storm Water Management Ordinance and the approved plans; (b) the storm water management facilities have been inspected and approved by the Township Engineer; (c) all financial security, including any maintenance security, posted by Grantor has been released by the Township; and (d) Grantor has transferred the Premises and/or all lots to be created from the Premises to third parties. Notwithstanding the foregoing, Grantor's personal liability shall continue for any violations of this Agreement and Declaration of Easement which occurred during the time that Grantor owned the Premises or any lot created from the Premises or in the event the storm water management facilities were not completed, inspected or approved as set forth in (a) through (c) herein.
- 12. It is the intent of the parties to this Agreement that personal liability and maintenance obligations shall pass to subsequent title owners upon change in ownership of the Premises or any lot created from the Premises, and such subsequent owners shall assume all personal liability and maintenance obligations for the time period during which they hold title. Personal liability shall remain for any violations of this Agreement and Declaration of Easement which occurred during the period in which an owner held title.
- 13. Strasburg Township may, in addition to the remedies prescribed herein, proceed with any action at law or in equity to bring about compliance with the Strasburg Township Storm Water Management Ordinance, the Township Subdivision and Land Development Ordinance and this Agreement.
- 14. This Agreement and Declaration of Easement shall be binding upon the Grantor, the successors and assigns of Grantor, and all present and future owners of the Premises or any part thereof and is intended to be recorded in order to give notice to future owners of the Premises of their duties and responsibilities with respect to the storm water facilities. Grantor shall include a specific reference to this Agreement in any deed of conveyance for the Premises or any part thereof.
- 15. This Agreement and Declaration of Easement may be amended only by written instrument signed on behalf of all owners of the Premises and Strasburg Township.
- 16. When the sense so requires, words of any gender used in this Agreement and Declaration of Easement shall be held to include any other gender, and the words in the singular number shall be held

to include the plural, and vice versa.

IN WITNESS WHEREOF, the undersigned have caused this Agreement and Declaration to be executed on the day and year first above written.

	Strasburg Township
	Lancaster County, Pennsylvania
Attest:	By:
(Assistant) Secretary	(Vice) Chairman
	Strasburg Township Board of Supervisors
[Strasburg Township SEAL]	

(Individual or Husband and Wife Developer)

Witness:		
		(SEAL)
	(Signature of Individual)	
		(SEAL)
	(Signature of Spouse if Husband and Developers)	
	IF APPLICABLE	
	Trading and Doing Business as	
*********		· · · · · · · · · · · · · · · · · · ·
*********	***********	*****
(Partn	ership Developer*)	
	(Name of Partnership)	
Witness:		
	Ву	(Seal)
	Partner	(ocal)
	Ву	(Seal)
	Partner	
	Ву	(Seal)
*All Partners must execute the Agreement.	Partner	
An Faithers must execute the Agreement.		

***********	*************	*******
(Corp	poration Developer)	
(Nar	me of Corporation)	
ATTEST:		
By:(Assistant) Secretary	By: (Vice) President	
(CORPORATE SEAL)		
	**************************************	*******
(Ellinea Elasiii	(Name of Limited Liability Company)	
Witness:	By Member	(Seal)
	By Member	(Seal)

(ACKNOWLEDGMENT FOR STRASBURG TOWNSHIP

COMMONWEALTH OF PENNSYLVANIA)) S:	ς,
COUNTY OF	5.
Public in and for the aforesaid Commonwealth and Cou acknowledgedself to be (Vice) Chairman of Board of that he/she, as such officer, being authorized to do so,	, A.D., 20, before me, the undersigned officer, a Notary unty, personally appeared, who of Supervisors of Township, Lancaster County, Pennsylvania, and executed the foregoing Storm Water Management Agreement and tained, by signing the name of such Township byself as such
IN WITNESS WHEREOF, I set my hand and office	cial seal.
N	otary Public:
N	1y Commission expires:
(ACKNOWLEDGMENT FOR INDIV	/IDUAL OR HUSBAND AND WIFE DEVELOPER)
COMMONWEALTH OF PENNSYLVANIA) COUNTY OF	S:
aforesaid Commonwealth and County, came the above known to me (or satisfactory proven) to be the person acknowledged the foregoing Storm Water Management deed and desired the same to be recorded as such. IN WITNESS WHEREOF, I set my hand and office.	_, before me, the subscriber, a Notary Public, in and for the t-named
	ly Commission expires:
	NT FOR CORPORATE DEVELOPER)
COMMONWEALTH OF PENNSYLVANIA) COUNTY OF	S:
undersigned officer, wh of, a corporation	, before me, a Notary Public, personally appeared, the o acknowledgedself to be theon, and that such officer being authorized to do so, acknowledged ained, by signing the name of the corporation byself as
In Witness Whereof, I set my hand and officia	seal.
N	otary Public:
N	ly Commission expires:
(ACKNOWLEDGMEN	T FOR PARTNERSHIP DEVELOPER)
COMMONWEALTH OF PENNSYLVANIA)	•

COUNTY OF) SS: _)
appeared w	, 20, before me, a Notary Public, the undersigned officer, personally tho acknowledged themselves to be all of the partners of
	Notary Public:
	My Commission expires:
(ACKNOWLEDGN	IENT FOR LIMITED LIABILITY COMPANY LANDOWNER)
COMMONWEALTH OF PENNSYLVANIA COUNTY OF)) _) SS:
·	, 20, before me, the undersigned officer, personally appeared who acknowledged themselves to be all of the members of
and that they, as such members, being aut	horized to do so, executed the foregoing instrument for the purposes therein ted liability company by themselves as such members.
	Notary Public:
	My Commission expires:

JOINDER BY MORTGAGEE

	("Mortgagee"), as holder of a certain
mortgage on the premises of	within Township, Lancaster
County, Pennsylvania, described in the Deed recorded in rec	orded in/at
, in the Office of the	Recorder of Deeds in and for Lancaster
County, Pennsylvania, which mortgage, in the amount of $\$ _	, is dated
, , and is recorded or is about to be recorded in the $\ensuremath{Recorde}$	r of Deeds Office in and for Lancaster County,
Pennsylvania, as well as any other mortgages which Mortga	gee may now or hereafter hold on the Premises
(all such mortgages hereinafter collectively referred to as the $\ensuremath{\text{\#}}$	Mortgages"), joins in, consents to, and expressly
approves the grant of easements and other rights and priva	vileges described in the attached Storm Water
Management Agreement and Declaration of Easement (the "A	greement").
The Mortgagee, for itself, its successors and assigns (w	hich shall include any assignee of the Mortgages
and any purchaser of the Premises at a sale in foreclosure of t	he Mortgages or otherwise), hereby covenants
and agrees that the rights and privileges herein granted	d with respect to the Premises shall not be
terminated or disturbed by reason of any foreclosure or o	other action which may be instituted by the
Mortgagee, its successors and assigns, as a result of an	y default under the Mortgages or the debt
instruments that such Mortgages secure. Mortgagee by conse	enting to the Agreement shall not by virtue of its
interest as Mortgagee be deemed to have undertaken any	of the obligations of the Grantor under the
Agreement, including but not limited to construction, mainten	ance, inspection or indemnification.
IN WITNESS WHEREOF, Mortgagee hereby joins in th	ne execution of the Agreement as of this
day of, 20	_·
(Na	ime of Mortgagee)
ATTEST:By:	
[SEAL]	

(ACKNOWLEDGMENT FOR MORTGAGEE)

COMMONWEALTH OF PENNSYLVANIA) } SS:	
COUNTY OF) 33.	
	, 20, before me, a Notary Public, the undersigned officer, pers	sonally
appeared,	_ who acknowledgedself to be the of	
	, a corporation, and that such officer being authorized to do so, acknowledge.	ledged
the foregoing instrument for the purpos	se therein contained, by signing the name of the Bank byself as	J
In Witness Whereof, I set my h	and and official seal.	
	Notary Public:	
	My Commission expires:	